



Gardz®

High Performance Sealer

Product No. 02301

GARDZ is a revolutionary, clear water-base sealer formulated to penetrate and seal problem porous surfaces with a rock hard finish that creates a sound, water-resistant, trouble-free foundation for any decorating project.

GARDZ prevents bubbles that form when damaged drywall is skimcoated with spackling or joint compound. GARDZ penetrates and seals damaged facing paper and exposed gypsum core, restoring drywall to a sound surface for repairs, suitable for painting or wallcovering.

New gypsum drywall, joint compound and spackling are very porous and can make finish coatings appear splotchy and uneven. GARDZ penetrates and uniformly seals, creating a moisture-resistant film that protects drywall from blistering, tearing and other damage when redecorating in the future.

- Penetrates and seals down damaged drywall, eliminates bubbles
- Seals builder's flat, skimcoats and spackling
- Protects new drywall
- Completely seals in residual wallpaper adhesive
- Seals textured walls and popcorn ceilings
- Easy to apply, high spread rate, fast drying
- Water-base, low odor, dries clear

Generic Type

Clear, water-base acrylic sealer for porous and water-sensitive surfaces.

Surfaces

Interior commercial, institutional, residential walls and ceilings.

Substrates

New and damaged drywall, plaster and masonry; joint compound and spackling repairs and skimcoats; texture paint and texture finishes; uncoated wallpaper and wallpaper adhesive residue; builder's flat paint.

Spread Rate

350 to 450 sq. ft. (33 to 42 m²) per gallon. Application losses may vary with the porosity of the substrate and the method of application. Skim coated and spackled areas are considered very porous and require heavier application.

Application Methods: **Brush, roller, sprayer**

Solids by Weight: **26%**

Solids by Volume: **22%**

Density: **8.4 lbs/gal**

MAX VOC: **100 g/L**

Dry to touch @70°F: **30 minutes**

Dry to recoat @70°F: **30 minutes**

Application Conditions:

Humidity: **0% to 85%**

Temp: **50°F to 90°F**

Cleanup: **Water and detergent**

Availability: **Quart, gallon, 5 gallon**

Meets or exceeds SCAQMD

Rule 1113 definition for


Primer, Sealer & Undercoater



Damaged
drywall



New drywall,
skimcoat &
spackling

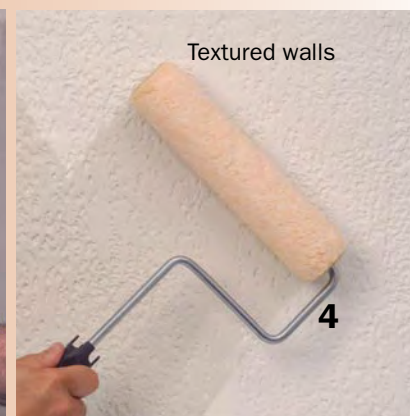

Textured walls